

Creative LED Display
FS Series (indoor) / FSO (Outdoor)




Flexible LED Display
 Innovative and Creative flexible Led screen




A Creative LED Display
 for flexible curve indoor application




Product Features

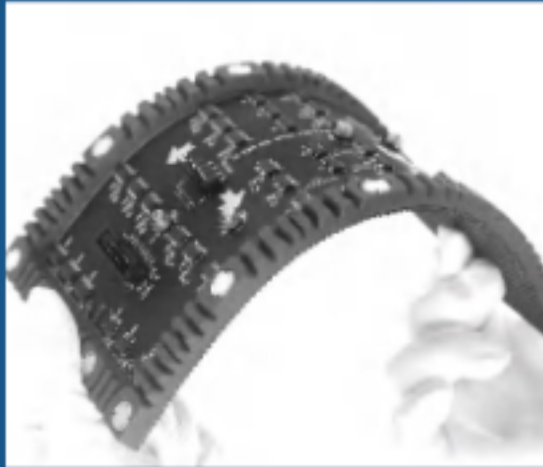

Large Curve Angle Design
 FS / FSO Series curve angle
 can reach more than $\pm 72^\circ$

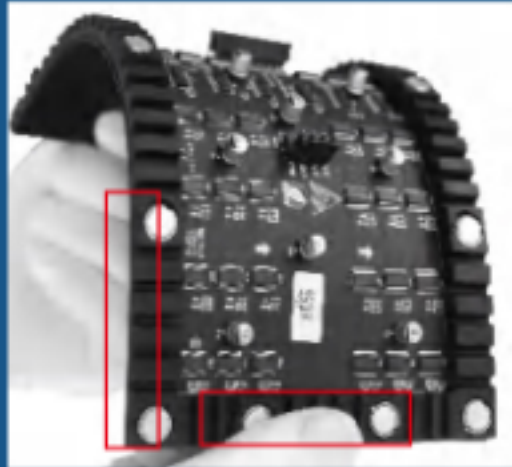


High Strength Magnets
 FS /FSO Series designs with
 very high strength magnets
 which promise the screen
 installations safe and reliable.

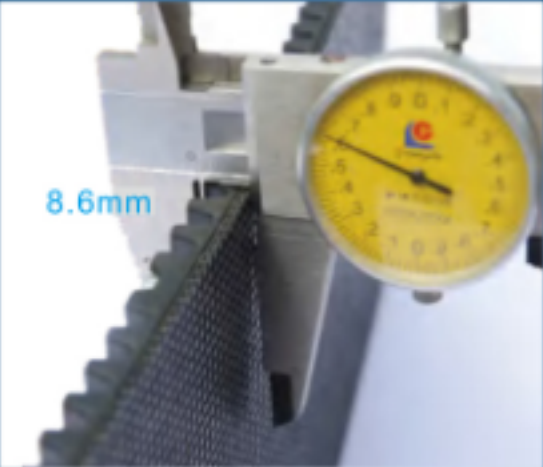


Super slim and lightweight
 8.6mm thickness and only
 7kg/sqm



Concave and Convex Flexible
 Cecile R&D team design with
 special soft material which anti-
 fire. Single module can be
 concave and convex
 in same time. Which makes the
 screen can have more various
 shape.

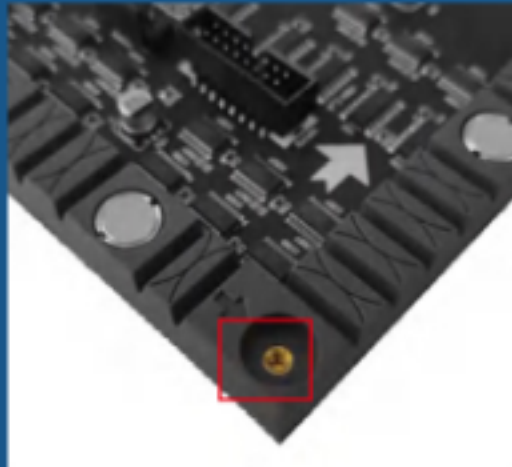

Adjustable magnets
 The modules design with,
 adjustable magnets which can
 adjust the module installation
 height. If the wall or structure
 is not flat. We can use this
 function to adjust same level.

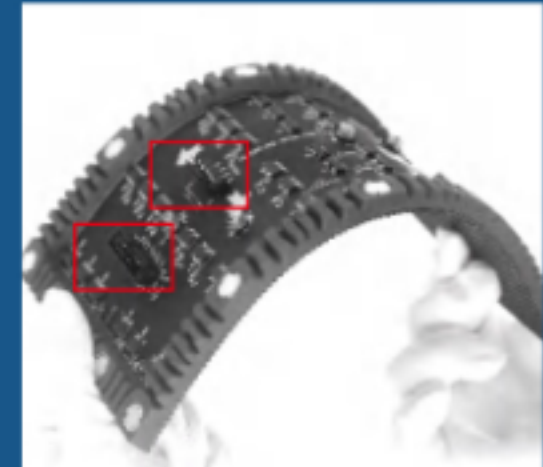


Stable Display Effect
 FS / FSO Series use high
 quality signal and power
 plugs.
 Stable effect for whole
 display effect

Product Overview



Indoor Flexible module



RGB P5 Flexible LED Module
 Size:320x160mm
 Scan:1/16 scan
 ICN2038SIC

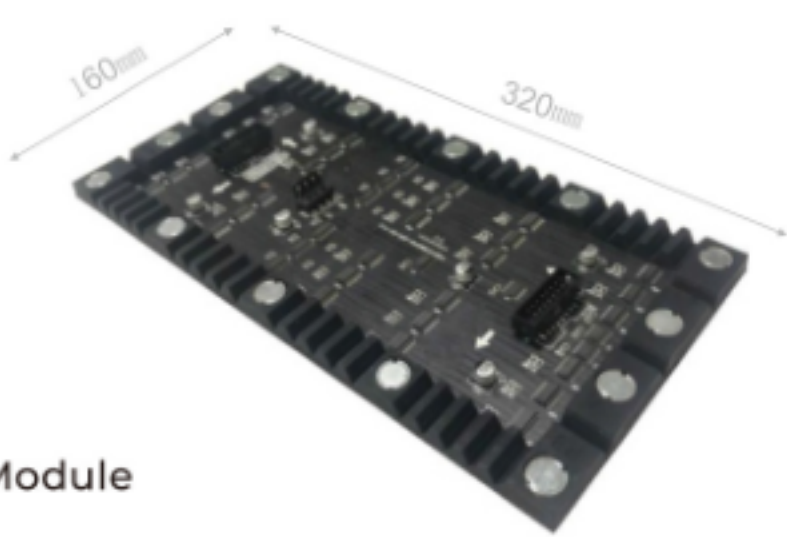

Outdoor Flexible module (FSO)

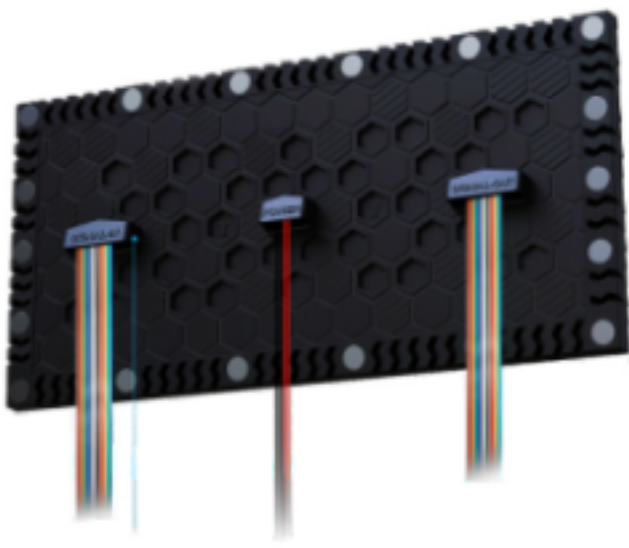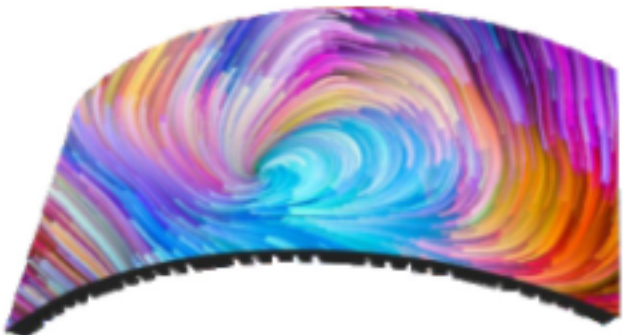

Specification

Model	LV-FS12	LV-FS15	LV-FS18	LV-FS20	LV-FS25	LV-FS30	LV-FSO25	LV-FSO30	LV-FSO40
Pixel Pitch	125mm	156mm	1.875mm	2.0mm	2.5mm	3.0mm	2.5mm	3.0mm	4.0mm
Resolution	640,000pixels/sqm	409,600pixels/sqm	284,444pixels/sqm	250,000pixels/sqm	160,000pixels/sqm	105,688pixels/sqm	160,000pixels/sqm	111,111pixels/sqm	62,500pixels/sqm
LED Configuration	SMD1010	SMD1010	SMD1010	SMD1515	SMD2121	SMD2121	SMD1415	SMD1415	SMD1921
Module Size	240 x 120 x86mm	240 x 120 x86mm	240 x 120 x86mm	240 x 120 x86mm	240 x 120 x86mm	240 x 120 x86mm	320X160X12MM	320X160X12MM	320X160X12MM
Module Resolution	192 x 96 dots	152 x 76 dots	128 x 64 dots	120 x 60 dots	96 x 48 dots	80 x 40 dots	128*64dots	104*52dots	80*40dots
Best Viewing Distance	>1.2m	>1.2m	>1.9m	>2m	>2.5m	>3m	≥2.5m	≥3m	≥4m
Panel Size	Customized						customized		
Panel Resolution	Depends on Pixel Pitch						Depends on Pixel Pitch		
Module Arrangement	Customized						Customized		
Refresh Rate	≥1920Hz						≥1920Hz		
Panel Weight	7kg/sqm						11kgs/sqm		
Brightness	800nit						5000cd		
Best Viewing Angle	160°/120°						X:140° / Y:120°		
Working Voltage	AC200~240V (+/-10%)						AC200~240V (+/-10%)		
Maintenance Way	Front /Rear Maintenance						Front /Rear Maintenance		
Max Power Consumption	600W/m ²						700w		
Ave.Power Consumption	150W/m ²						220w		
Life Span	100,000Hours								