




Front view

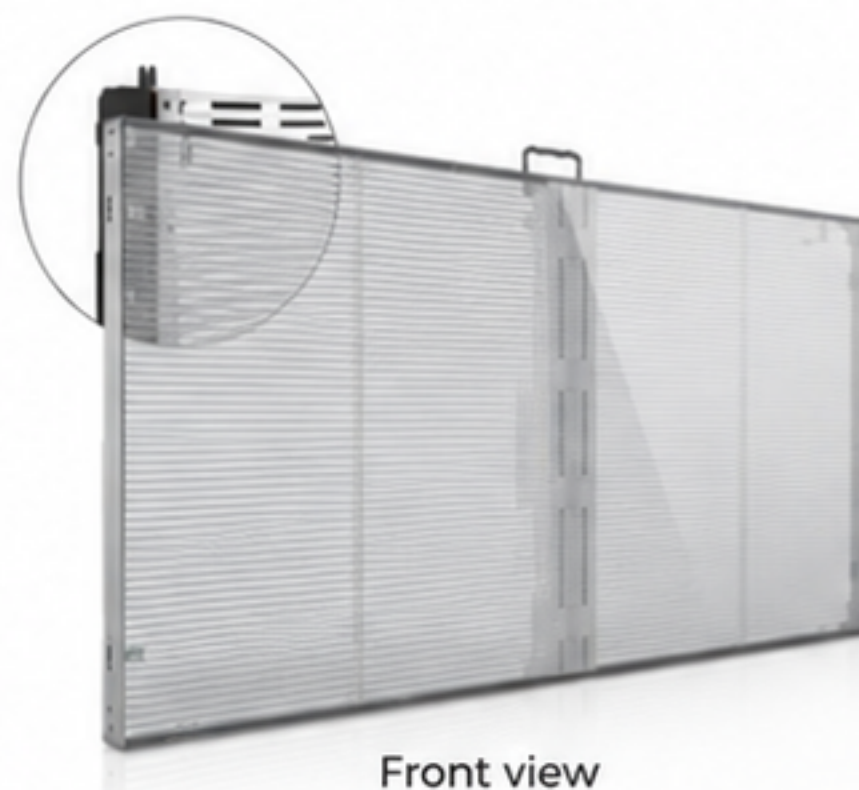

Rear view

Specification

Model	LV-TW26S	LV-TW39S	LV-TW26H	LV-TW39H
Pixel Pitch	H.2. 6MM, V. 5.2mm	H.3.9MM, V. 7.8mm	H.2. 6MM, V. 5. 2mm	H.3.9MM, V. 7.8mm
Resolution	73728pixels/sqm	32768pixels/sqm	73728pixels/sqm	32768pixels/sqm
LED Configuration	SMD1515	SMD1921	SMD1515	SMD1921
Module Size	500 x125 x 5 mm	500 x125 x 5 mm	500 x125 x 5 mm	500 x125 x 5 mm
Module Resolution	192 x 24 dots	128 x 16 dots	192 x 24 dots	128 x 16 dots
Panel Size	1000*500mm	1000*500mm	1000*1000mm	1000*1000mm
Panel Resolution	384*96dots	256*64dots	384*192dots	256*128dots
Refresh Rate	≥1920Hz	≥1920Hz	≥1920Hz	≥1920Hz
Panel Weight	5kg	5kg	10kg	10kg
Brightness	≥3000 nits			
Best Viewing Distance	>4m			
Best Viewing Angle	120°/120°			
Working Voltage	AC200~240V (+/-10%)			
Maintenance Way	Front Maintenance (Back optional)			
Power Consumption	Max: 300W; Avg: 120W		Max: 600W; Avg: 240W	
Life Span	100,000 Hours			